


# **Elevator Control Valves**



KV solenoid valves are designed for small hydraulic lifts operating at speeds up to 0.16 m/s (32 fpm) depending on the valve selected. The smooth and accurate ride characteristics of the KV2S valve which includes 'soft stop' in both directions, render it highly suitable for quality home lifts and lifts for the handicapped.

Flow Range:	5-80 l/min (1.3-21 US gpm) - see flow pressure charts				
Pressure Range:	8-100 bar (116-1450 psi)				
Burst Pressure:	500 bar (7251 psi)				
Coils AC:	24 V/1.8 A, 42 V/1.0 A, 110 V/0.5 A, 230 V/0.18 A, 50/60 Hz	Insulation Class, AC and D	<b>C:</b> IP 68		
Coils DC:	12 V/2.1 A, 24 V/1.1 A, 42 V/0.6 A, 80 V/0.3 A, 125 V/0.25 A, 19	6 V/0.14 A.			
Oil Viscosity:	25-60 cSt. at 40°C (104°F)	Max. Oil Temperature:	70°C (158°F)		
Operation oil temperature range: 10°C-60°C (50°F-140°F), for oil VGA46: 250cSt20 cSt.					
Optimal oil temperature range: 25°C-55°C (77°F-131°F), for oil VGA46: 100cSt24 cSt.					
Ambient temperature range: 0°C-70°C (32°F-158°F)			CSP B44.1 CSP US ASME-A17.1		
Ports:	<b>P</b> Pump, <b>Z</b> Cylinder and <b>T</b> Tank all G <sup>1</sup> ⁄2"		ASME-A17.1		
			CE		



KV1P z 1.8 kg T P	Up Down	One up speed, 0.16 m/s (32 fpm) max. Up start has built-in damping. Up stop has no damping (pump stops). One down speed, 0.16 m/s (32 fpm) max. Down start has adjustable damping. Down stop has adjustable. Down stop has built-in damping.
KV1S z	Up Down	One up speed 0.16 m/s (32 fpm) max. with soft stop, or 0.4 m/s (80 fpm) max. with overtravel and relevelling. Up start has built-in damping. Up stop has adjustable damping (delayed pump stop required). One down speed, 0.16 (32 fpm) max. Down start has adjustable damping.
2.3 kg <b>T P</b>		Down speed is adjustable damping. Down stop has built-in damping.
KV2P	Up	One up speed, 0.16 m/s (32 fpm) max. Up start has built-in damping. Up stop has no damping (pump stops).
Z	Down	Two down speeds, 1 m/s (200 fpm) max. Down start has adjustable damping. Fast down speed and levelling speeds are adjustable. Slow down and stop have built-in damping.
2.5 kg <b>T P</b>		
KV2S	Up	One up speed, 0.16 m/s (32 fpm) max. with soft stop, or 0.4 m/s (80 fpm) max. with overtravel and relevelling. Up start has built-in damping. Up stop has adjustable damping (delayed pump stop required).
3.2 kg T P	Down	Two down speeds, 1 m/s (200 fpm) max. Down start has adjustable damping. Fast down speed and levelling speeds are adjustable. Slow down and stop have built-in damping.
Blain Hydraulics GmbHTel. +49 7131Pfaffenstrasse 1Fax +49 713174078 Heilbronnwww.blain.deGermanyinfo@blain.de	282199	BLAIN Designer and Manufacturer of the highest quality control valves & safety components for hydraulic elevators

### **Control Elements**

- Solenoid 'Up Stop' Α
- Solenoid 'Down Deceleration' С
- Solenoid 'Down Stop' D
- U Bypass Valve
- Manual Lowering Н

### Adjustments UP Bypass

- Check Valve 1 5 Up Soft Stop
- Х Down Valve
- Υ Down Level Valve


٧

- F Main Filter
- S **Relief Valve**


Up Acceleration built-in

- Adjustments DOWN
- 6 Down Acceleration
- 7 Down Full Speed
- 9 Down Levelling Speed Down Deceleration built-in



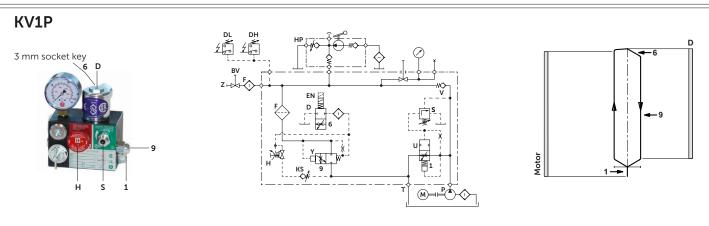



Hydraulic Circuit

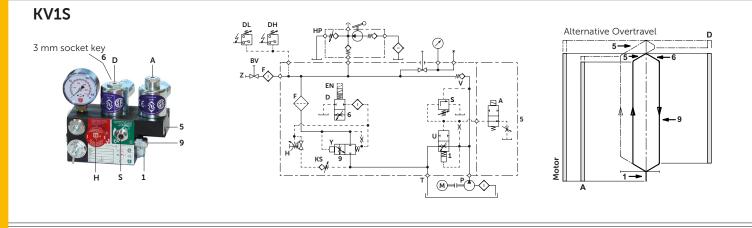

### KV2P







#### KV2S DI DH Alternative Overtravel С D 4 4 'n 5 3 mm socket key Motor 1-Ĥ 7 9 M s € Α

### **BLAIN HYDRAULICS**

### **Electrical Sequence**



**Warning:** Only qualified personnel should adjust or service valves. Unauthorised manipulation may result in injury, loss of life or damage to equipment. Prior to servicing internal parts, ensure that the electrical power is switched off, cylinder line is closed and residual pressure in the valve is reduced to zero.



### **Adjustments UP**

**Valves are already adjusted and tested.** Check electrical operation before changing valve settings. Test that the correct coil is energized, by removing the nut and raising the coil slighty to feel pull.

Nominal Settings: Adjustment 1 level with flange face. Adjustment 5 (KV1S & KV2S) level with flange face.

**KV1P 1. Up Bypass:** When the pump is started, the unloaded car should remain stationary at the floor for a period of about 1 second before starting upwards. The length of this delay is according to the setting of adjustment **1**. 'In' (clockwise) shortens the delay, 'out' (c-clockwise) lengthens the delay.

**Up Stop:** At floor level, the pump-motor is de-energized. The stop may be abrupt depending on load and speed of approach. No adjustment possible.

S Relief Valve: 'In' (clockwise) produces a higher, 'out' (c-clockwise) a lower maximum pressure setting. After turning 'out', open manual lowering H for an instant. Important: When testing relief valve, close ball valve gradually.

KV1S 1. Up Bypass: When the pump is started, the unloaded car should remain stationary at the floor for a period of about 1 second before starting upwards. The length of this delay is according to the setting of adjustment 1. 'In' (clockwise) shortens the delay, 'out' (c-clockwise) lengthens the delay. 5. Up Stop: At floor level coil A is de-energized. Through a time relay the pump must run approx. 1 second longer to allow the car to stop smoothly by valve operation according to the setting of adjustment 5. 'In' (clockwise) provides a softer stop, 'out' (c-clockwise) a quicker stop. Pre-adjustment: With coil A disconnected and the pump running, 5 should be turned in until the car starts to move up, then slowly turned out until the car stops. Alternative Up Stop: At relatively higher speeds and with the time relay arrangements as with 'up stop' above, the car may travel to just above floor level. In overtravelling the floor, down levelling coil **D** is energized, lowering the car smoothly back down to floor level where **D** is de-energized. S Relief Valve: 'In' (clockwise) produces a higher, 'out' (c-clockwise) a lower maximum pressure setting. After turning 'out', open manual lowering **H** for an instant. Important: When testing relief valve, close ball valve gradually. 1. Up Bypass: When the pump is started, the unloaded car should remain stationary at the floor for a period of about 1 KV2P second before starting upwards. The length of this delay is according to the setting of adjustment 1. 'In' (clockwise) shortens the delay, 'out' (c-clockwise) lengthens the delay. Up Stop: At floor level, the pump-motor is de-energized. The stop may be abrupt depending on load and speed of approach. No adjustment possible. S Relief Valve: 'In' (clockwise) produces a higher, 'out' (c-clockwise) a lower maximum pressure setting. After turning 'out', open manual lowering **H** for an instant. Important: When testing relief valve, close ball valve gradually.

KV2S

**1. Up Bypass:** When the pump is started, the unloaded car should remain stationary at the floor for a period of about 1 second before starting upwards. The length of this delay is according to the setting of adjustment **1**. 'In' (clockwise) shortens the delay, 'out' (c-clockwise) lengthens the delay.

**5. Up Stop:** At floor level coil **A** is de-energized. Through a time relay the pump must run approx. 1 second longer to allow the car to stop smoothly by valve operation according to the setting of adjustment **5**. 'In" (clockwise) provides a softer stop, 'out' (c-clockwise) a quicker stop. Pre-adjustment: With coil **A** disconnected and the pump running, 5 should be turned in until the car starts to move up, then slowly backed off again until the car stops.

Alternative Up Stop: At relatively higher speeds and with the time relay arrangements as with 'up stop' above, the car may travel to just above floor level. In overtravelling the floor, down levelling solenoid **D** is energized, lowering the car smoothly back down to floor level where **D** is de-energized.

**S Relief Valve:** 'In' (clockwise) produces a higher, 'out' (c-clockwise) a lower maximum pressure setting. After turning 'out', open manual lowering **H** for an instant.

Important: When testing relief valve, close ball valve gradually.



**Warning:** Only qualified personnel should adjust or service valves. Unauthorised manipulation may result in injury, loss of life or damage to equipment. Prior to servicing internal parts, ensure that the electrical power is switched off, cylinder line is closed and residual pressure in the valve is reduced to zero.



## **Adjustments DOWN**

Valves are already tested and adjusted. Check electrical operation before changing valves settings. Test that the correct coil is energized by removing nut and raising the coil slightly to feel pull.

KV Nominal Settings: Adjustments 7 & 9 level with flange face.

### KV1P / KV1S

- **6. Down Acceleration:** When coil **D** is energized, the car will accelerate downwards according to the setting of adjustment **6**. 'In' (clockwise) provides a softer down acceleration, 'out' (c-clockwise) a quicker acceleration. Pre-adjustment: Turn adj. **6** all the way in and then energize coil **D**. Turn **6** slowly back out until the car accelerates downwards.
- 9. Down Speed: With coil D energized as above, the down speed of the car is according to the setting of adjustment 9. 'In' (clockwise) provides a slower down speed, 'out' (c-clockwise) a faster down speed.

Down Stop: At floor level, coil D is de-energized causing the car to stop. No adjustment necessary.

H Manual Lowering: 'out' (c-clockwise) allows the car to be lowered by hand. Closes automatically on release.

### KV2P / KV2S

- 6. Down Acceleration: When coil D is energized, the car will accelerate downwards according to the setting of adjustment 6. 'In' (clockwise) provides a softer down acceleration, 'out' (c-clockwise) a quicker acceleration. Pre-adjustment: Turn adj. 6 all the way in and then energize coil D. Turn 6 slowly back out until the car accelerates downwards.
- 7. Down Speed: With coils C and D energized as above, the down speed of the car is according to the setting of adjustment 7. 'In' (clockwise) provides a slower down speed, 'out' (c-clockwise) a faster down speed.
- **Down deceleration:** When coil **C** is de-energized whilst coil **D** remains energized, the car will decelerate according to the built-in damping. No further adjustment will be required.
- 9. Down Levelling: With coil C de-energized and coil D remaining energized, the car will travel at its down levelling speed according to the setting of adjustment 9. 'In' (clockwise) provides a slower, 'out' (c-clockwise) a faster down levelling speed.

Down Stop: At floor level, coil D is de-energized causing the car to stop. No adjustment necessary.

H Manual Lowering: 'out' (c-clockwise) allows the car to be lowered by hand. Closes automatically on release.


**KS Slack Rope Valve:** Coil **D** must be de-energized! The KS, is adjusted with a 3 mm Allen key by turning the screw **K** 'in' for higher pressure and 'out' for lower pressure. With **K** turned all the way 'in', then half a turn back out, the unloaded car should descend when Manual Lowering **H** is opened. Should the car not descend, **K** must be turned out until the car just begins to descend, then turned out a further half turn to ensure that with cold oil, the car can be lowered as required.


### Optional

#### **KV Optional Equipment**


- BV Ball Valve built in
- **EN** Emergency Power Solenoid
- HP Hand Pump H 13
- KS Slack Rope Valve DH Pressure Switch 10-100
- **DH** Pressure Switch 10-100 bar **DL** Pressure Switch 1-10 bar
- **DL** Pressure Switch 1 **CSA** CSA Solenoids
- HA Emergency Manual Down Speed Adj.

The possible options are shown with KV1P Valve. The same Options can be applied to all other KV Valve types.

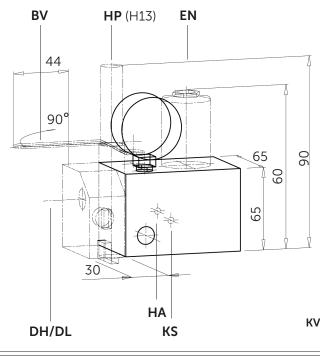

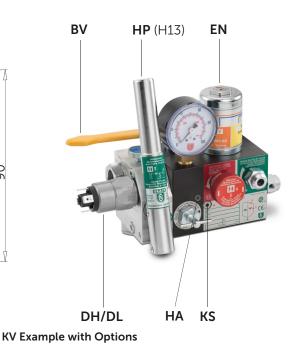

## Assembly

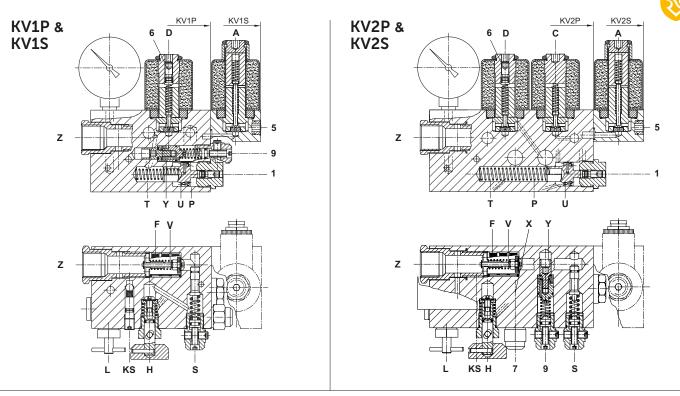

### **Control Elements**

- A Solenoid ,Up Stop'
- C Solenoid ,Down Deceleration'
- D Solenoid ,Down Stop'
- U Bypass Valve
- V Check Valve
- X Down Valve
- Y Down Levelling Valve
- H Manual Lowering
- L Gauge Shut Off Cock
- F Main Filter

### Connections

- P Pump
- T Tank return
- Z Cylinder


### Adjustments


- **1** Bypass
- 5 UP Soft Stop
- 6 Down Acceleration
- 7 Down Full speed
- 9 Down Levelling Speed
- **S** Relief Valve




**Important:** Length of  $\frac{1}{2}$ " thread on pipe connections should not be longer than 14 mm!

### **Measurements**






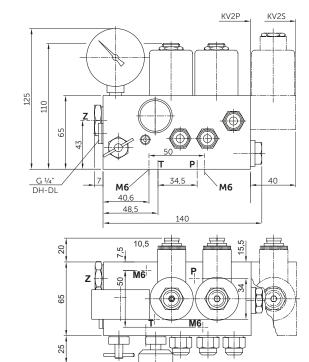





# **KV Spare Parts List**



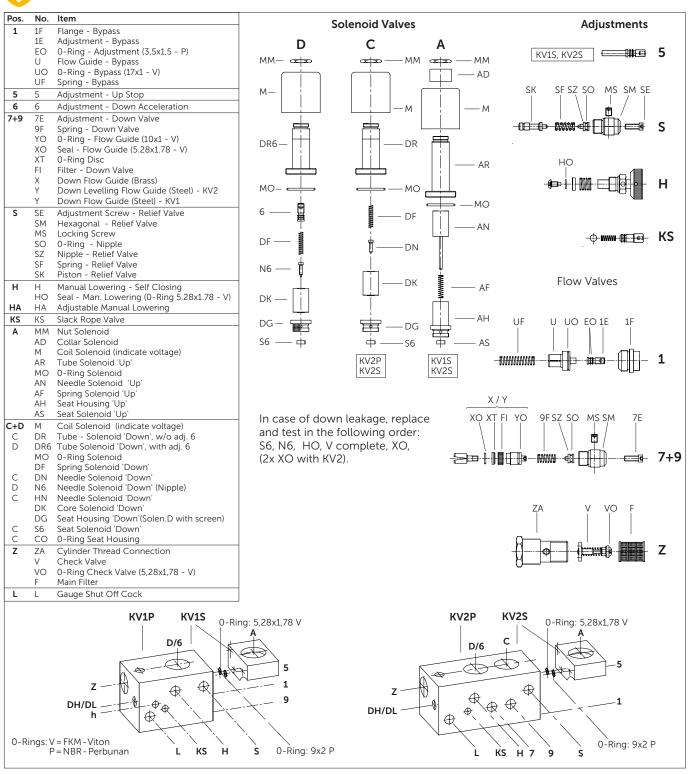


#### **Flow Guide Selection Charts**





Example order KV2S, 65 l/min, 25 bar (empty), 220 AC or: KV2S/80/220 AC

### Pressure Drop P - Z



I/min

oct 19